

OCULAR

Titan DC Charger

30kW and 60kW




Charging ahead, Powering tomorrow.

Explore the cutting-edge Titan DC, a 30kW and 60kW commercial EV charger that redefines reliability, and value. Titan represents the next generation of charging offering an ergonomic, adaptable, and innovative design compatible with all EV cars in Australia.

At Ocular engineering, power meets efficiency, ensuring a seamless user experience for charging your electric vehicles and fleets. Its class leading, weather-resistant and compact hardware can effortlessly be installed or mounted on the wall or floor providing unparalleled flexibility. Featuring dual charging capabilities, Titan's intelligent design facilitates simultaneous charging for two vehicles.

The Titan range is OCPP 1.6 & 2.0 compatible for smart charging, billing and secure identification. Interact effortlessly with the charger through the 8" LCD touchscreen, which displays key information and charging statistics, making your charging experience not just efficient but user-friendly.






COMPACT

Ergonomic yet high-performing design enhances comfort and safety without compromising functionality. Streamlined for efficiency, Titan ensures a minimal footprint, complemented by lightweight cables for user-friendly ease of use.



RELIABLE

Titan's innovative modularity outpacing the competition for a seamless and dependable charging experience. The reliable charging minimizes wait times and gets you back on the road faster.



VALUE

Exceptionally cost-effective, ensuring superior value for your investment. Experience reliability and power combined, delivering top-notch features for the perfect balance, ideal for value-conscious consumers.



BUS AND TRUCKS

Transforming the landscape of heavy-duty transportation, buses and trucks embrace a fast, reliable, and efficient power source, promising zero emissions. Join us in electrifying the journey and driving sustainability forward—one charge at a time.

PUBLIC


Reforming urban mobility, Titan chargers play a pivotal role in powering public cars, marking a shift towards sustainable and accessible charging infrastructure. Welcome the ease of electric mobility as we empower the public to choose a greener path forward.

FLEET

Turning electric mobility from possibility to reality, Titan fuels fleets with the silent power of electricity, propelling them into a future of clean and efficient transportation. Witness large fleets silently navigating the road, marking a new era where sustainability and innovation converge to shape the future.



TITAN DC CHARGER 30kW AND 60kW

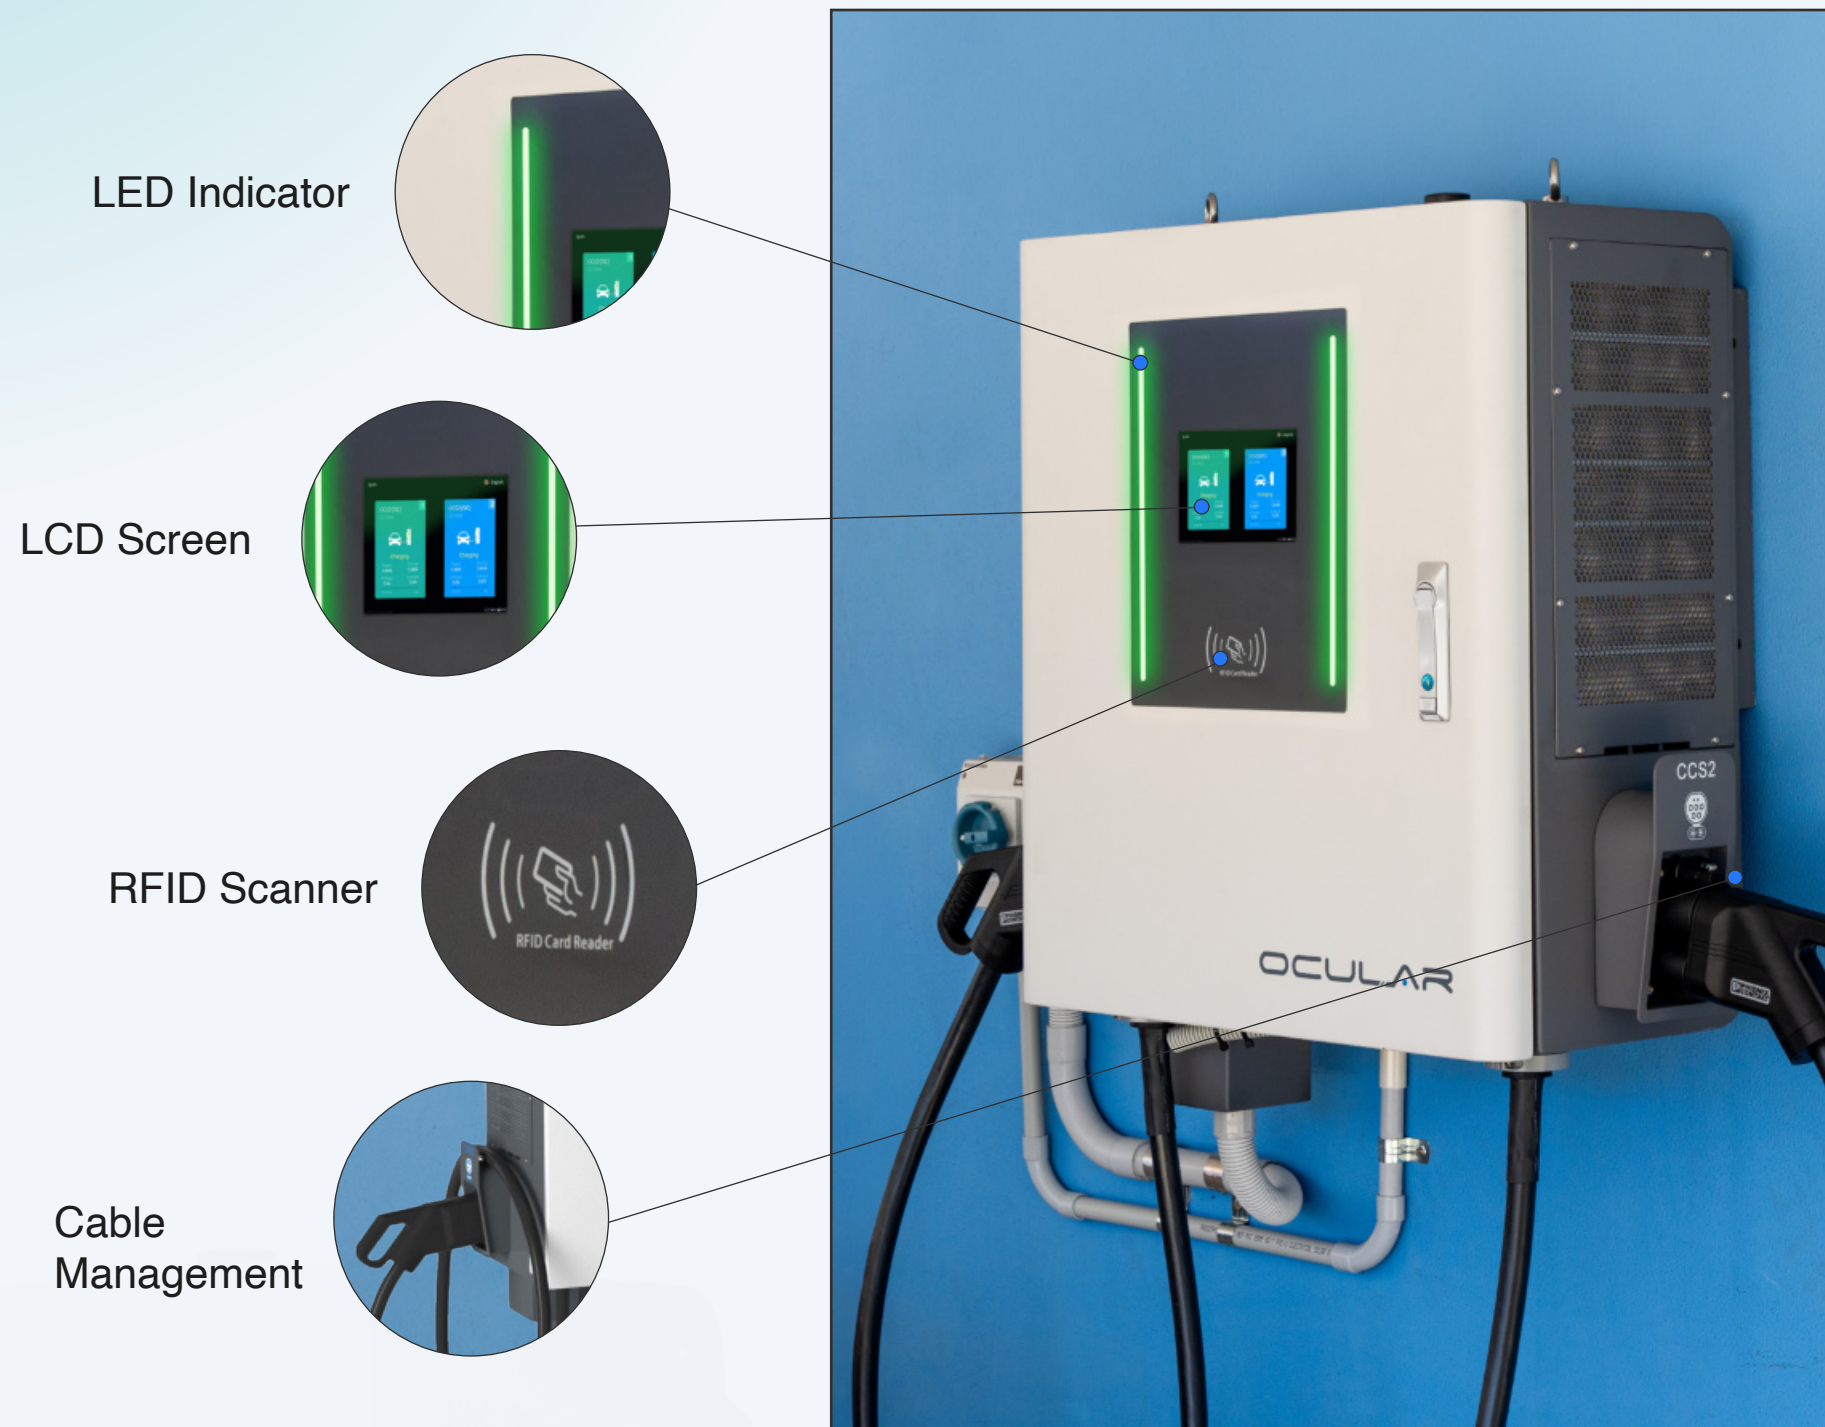

Empower your business with Titan – the symbol of intelligence and capability. The 30kW and 60kW are designed to prioritise modularity for easy maintenance. Titan combines smart technology with robust reliability for an unparalleled charging experience that is compatible with all EVs from public cars, buses, trucks to fleet vehicles.

- RCD inbuilt
- Built-in 4G modem
- MID metering
- OCPP 1.6 & 2.0
- Metallic frame
- Simplified maintenance
- Wall and Floor Mounted Options
- Load Manageable
- Compact size 85kg
- Up to 360km of additional range per hour



Stock Available in Australia

Enjoy peace of mind with predictable stock flow, uninterrupted delivery, stable inventory levels, and spares in stock to minimize downtime.



Easy Installation

Prioritizing simplicity and convenience, users can enjoy a quick and hassle-free installation experience.

WHY

OCCELAR



Pre-Commissioned

Each unit undergoes meticulous testing and configuration to ensure peak performance right out of the box.



Reliability and Support

Our dedication to customer satisfaction extends beyond the sale, providing unparalleled after-sales support by experts.



Generate Revenue

We recognize the importance of a thriving business; earn revenue through public billing and software.



OCULAR TITAN DC CHARGER

DATASHEET

Model	OC-30HY1	OC-60HY2
Power Output	30 kW	60 kW
Number of Charging Ports	1	2
Plug Type	CCS2 as standard, other options available on request	
Input Voltage	3-Phase 400V±15% AC	
Power Factor	≥0.99	
Frequency (Hz)	50/60Hz	
Efficiency	94%	
Output Voltage	150V-1000V DC	
Output Current	100A DC Max	200A DC Max
Display	8" TFT LCD touch screen	
User Authentication	RFID Card, Mobile App, Remote Access	
Emergency Stop	Push Button	
Charging Cable Length	7m Straight Cable	
Network Interface	Ethernet, 4G	
OCPP	OCPP1.6J, OCPP2.0.1	
Operating Temperature	(-30°C to +55°C) in operation, (-40°C to +75°C) in storage	
Working Humidity	95% relative humidity, non-condensing	
Altitude	Up to 6000 feet (2000 m)	
IP Rating	IP54	
Cooling	Forced Air	
Mounting Type	Wall or floor via optional pedestal	
Dimensions (H x W x D mm)	770 x 690 x 355 mm	
Net Weight	75 kg	85 kg
Electrical Protection	Over current, Short circuit, Over voltage, Under voltage, Ground fault, Lightning surge, Over temperature	
Certification	CE, IEC/EN 61851-1, IEC/EN 61851-23, IEC/EN 61851-21-2, RCM	
Supported Language	Language selectable by user on screen - English, French, German, Spanish, Italian, Portuguese, Russian, Čeština, Finnish, Chinese, Japanese, Romanian, Thai, Arabic, Turkish	
Warranty	24 months standard - warranty extension available	

POWERING THE JOURNEYS OF BUSINESSES AND PARTNERS





OCULAR

Charging ahead, powering tomorrow.



 ocularcharging.com.au

 sales.ocularcharging.com.au

 1300 912 650