

# Home 7kW/22kW







# Charging ahead, Powering tomorrow.

Welcome to the future of charging with the IQ Home, our cutting-edge charging solution is designed to meet the needs of modern electric vehicle owners, offering versatility, efficiency, and convenience at their doorstep. The IQ Home comes in both single-phase (7kW) and three-phase (22kW) configurations and is compatible with all electric vehicles in Australia.

The system comes with CT clamps to measure your solar production excess, which enables you to charge with green, free electricity from your solar panels, and protects your home from overloading.

The IQ Home has three different charging modes to suit your individual needs and solar production levels. Built to withstand the Australian elements, it comes with IP55 protection, ensuring reliable performance in any weather conditions. The unit's compact design makes it ideal for residential settings, allowing for easy installation and seamless integration into your home. Equipped with a 5m type 2 cable, the charger offers convenient and hassle-free charging for your EV.

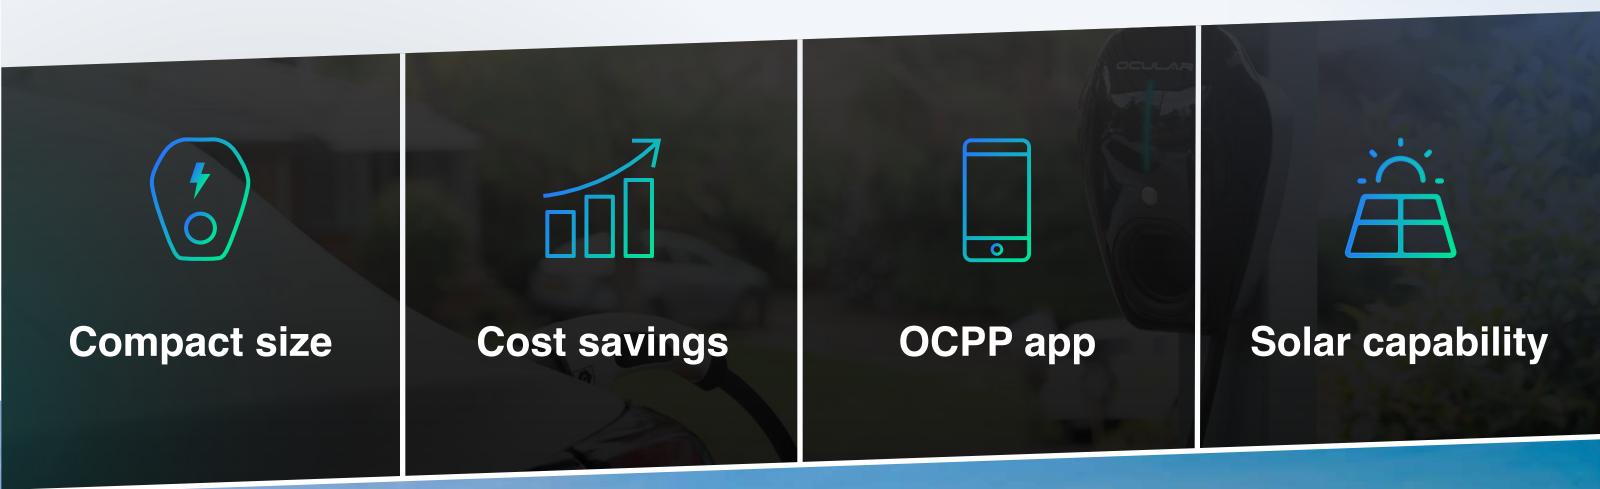

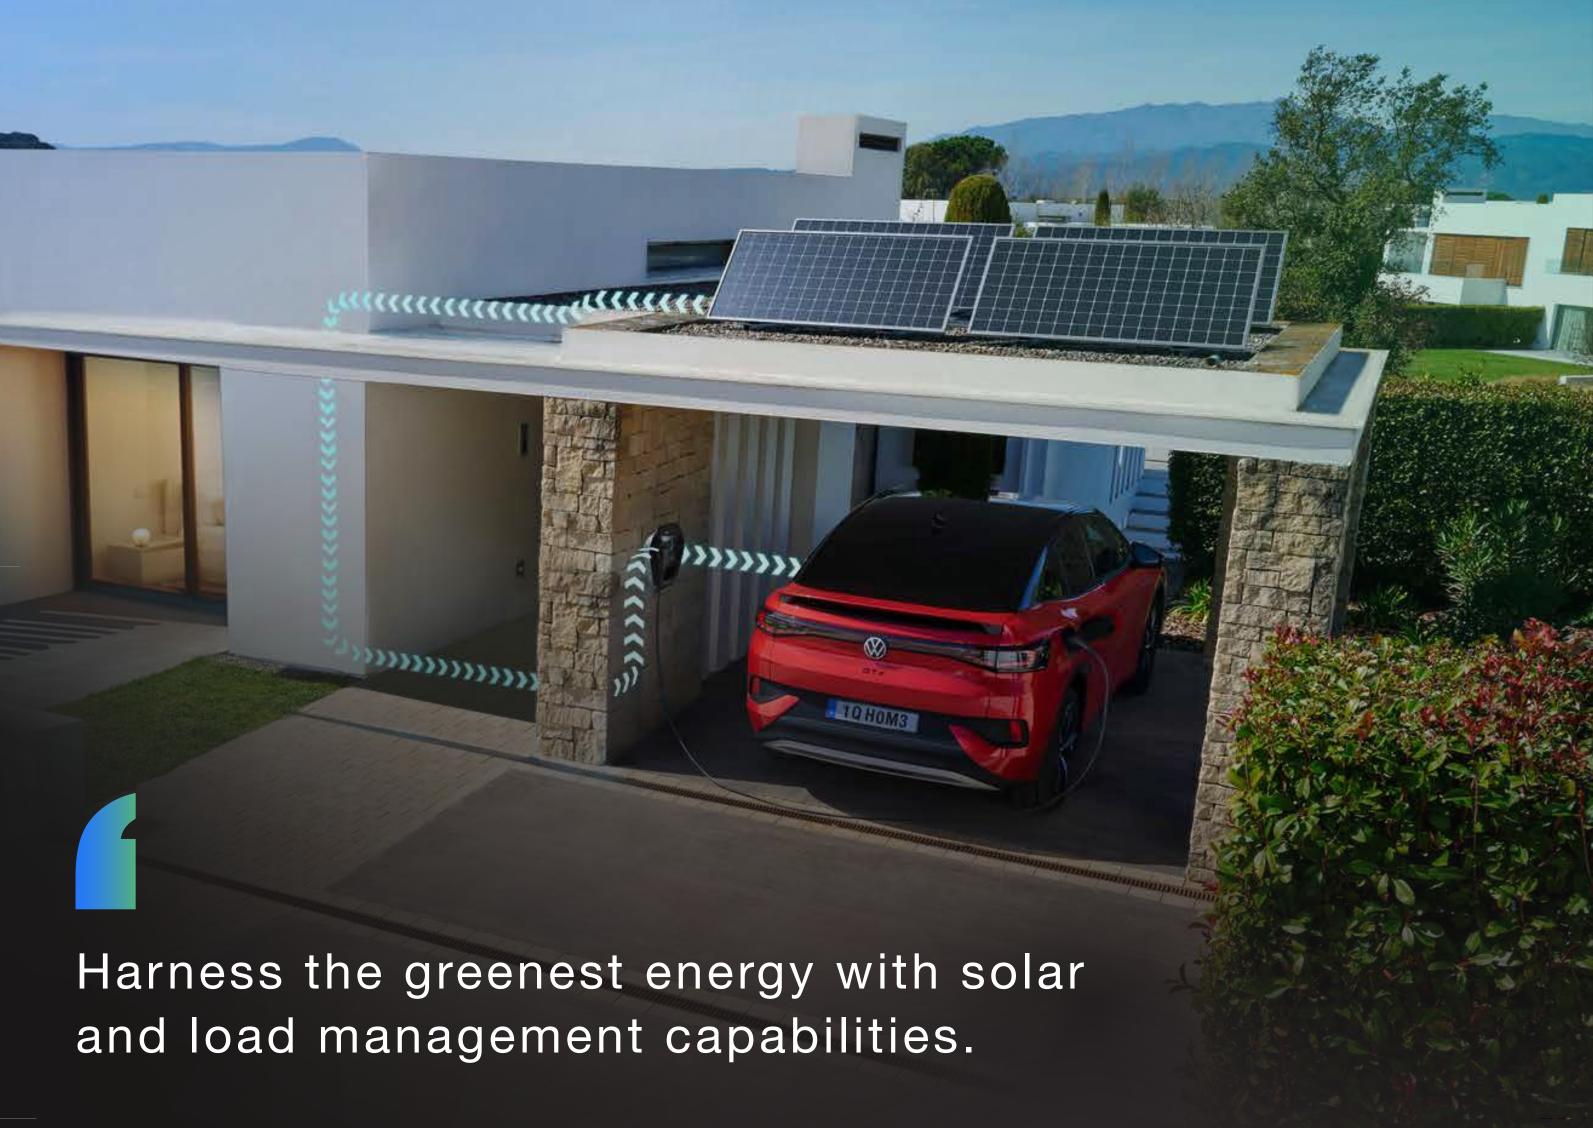

### FAST MODE

Maximum power from a renewable energy source or grid power


### SOLAR ASSIST MODE

Minimum of 6 Amps plus any excess solar produced

### SOLAR ONLY MODE


Charges only when excess solar power is produced



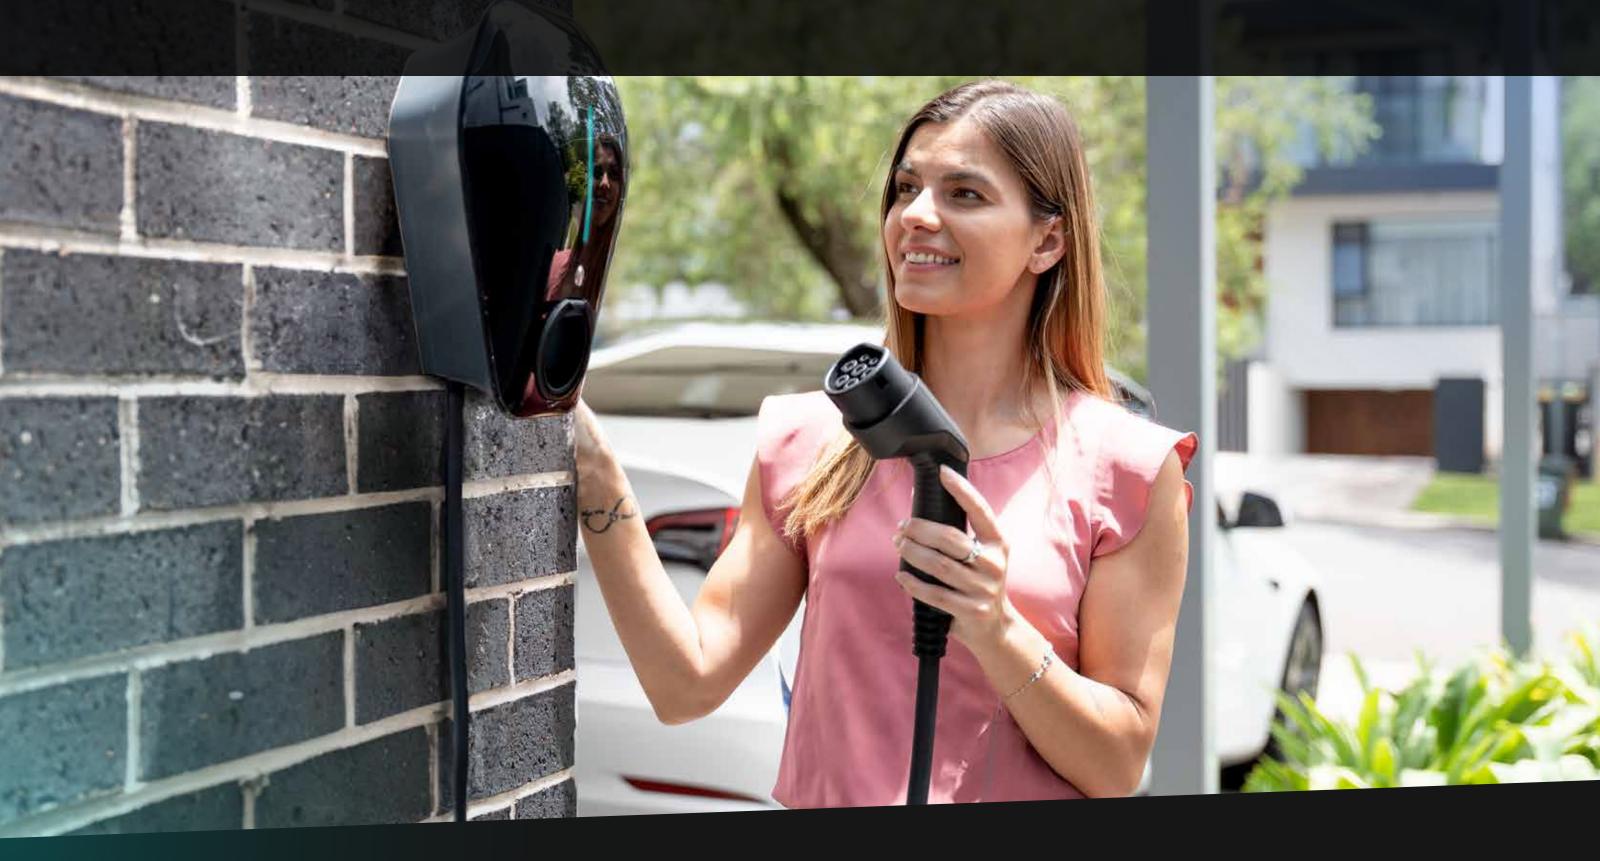

Designed to create enduring value for Australian homes offering flexibility and efficiency while combining advanced technology with user-friendly features.

## **OCULAR SMART HOME APP**

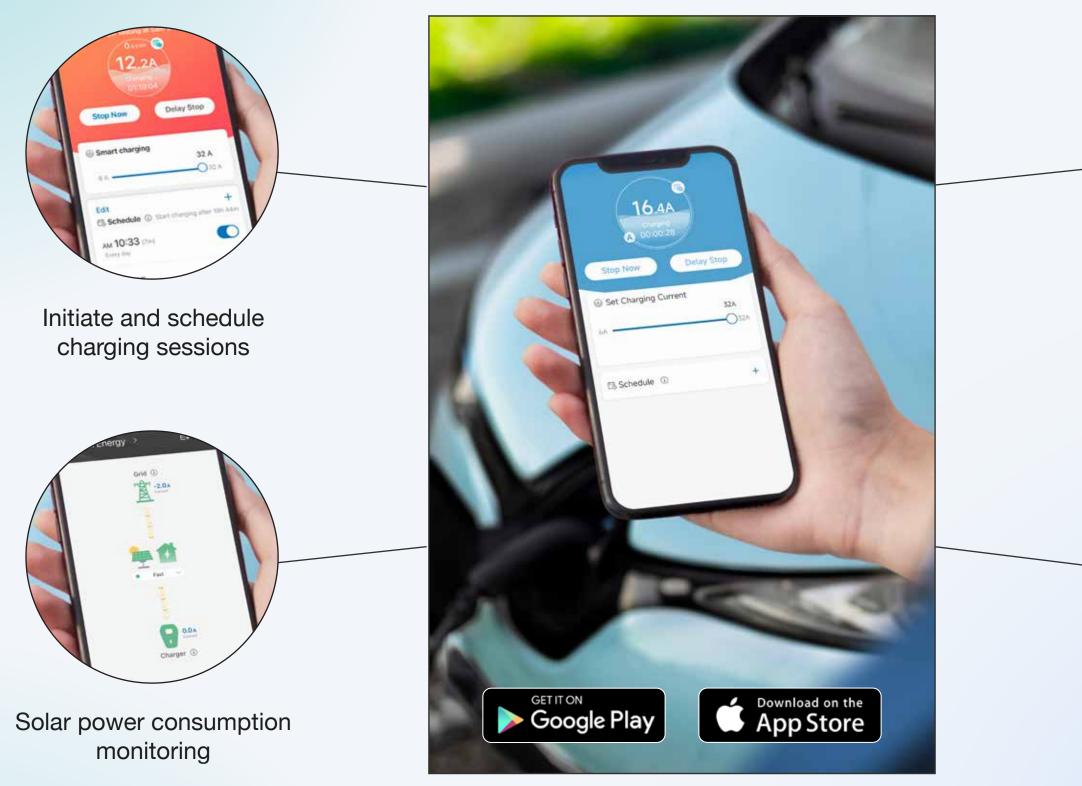





#### Intelligent charging with Ocular app



#### Charging session history





Reduce your installation and energy costs with solar and load balancing functionality.

# OCULAR IQ HOME

### DATASHEET

Model Number	IOCAH15-7T
Input Voltage & Current	230V± 20%
Frequency (Hz)	50
Charging Connector	IEC62196 T
Current Transformers Included	1
Current Transformer Specifications	20m cable, Fits 16mm diame
Power Output	7.2kW (1- Phase)
Output Voltage	230V ± 20%
Output Current	32A MA
User Interaction	Mobile App
Operating Temperature	-30°C to +5
Storage Temperature	-40°C to +
Working Humidity	5% - 95% relative h
IP Rating	
Internal RCD	30mA A
Electrical Protection	Over current, Short circuit Ground fault, Lightnin
Energy Meter	Inte
Internet Connection	Ether
Mounting	Wal
Dimension (H x W x D, mm)	398 * 285 * 226 mm
Net Weight	4.5kg
Recommended Cable Size (50m run)	10mm2 2C+E
Recommended Circuit Breaker	40A single phase type A RCBC
Certification	CE, IEC /EN 61851-1, IEC IEC/EN 61
Warranty	2

# **POWERING THE JOURNEYS OF AUSTRALIA**





homes enabled with ev charging



65+

electric vehicle variants compatible





# \$150K+

#### cumulative cost savings

Charging ahead, powering tomorrow.

ocularcharging.com.au

f

 $\bigcirc$ 

sales@ocularcharging.com.au





Sec. 1300 912 650